

JVS-N537-SDL


5.0MP Full-Color Video & Audio PoE Network Camera



Features

- Spotlight on Motion Detection
- Full-Color with Dual Smart Illumination
- Support Humanoid Detection
- Built-in Mic and Speaker
- With built-in PoE
- Equipped With unique VQC (Video Quality Catalyst) Technology
- Support SD Card(512G)

Dimension

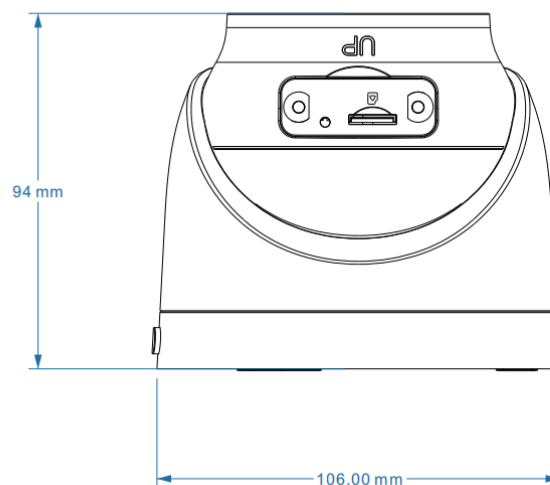

Specifications

Video	
Image Sensor	1/3" CMOS Sensor
Max Resolution	2560x1792
Effective Pixels	5.0MP
Compression Standard	H.264/H.265
Framerate	25fps
Bitrate	Main Stream: 317Kbps ~ 8Mbps Sub Stream: 68Kbps~2728Kbps
SNR (dB)	52dB
Min. Illumination	0Lux (light ON)
Lens	
Interface Type	M12
Lens	2.8mm
FOV	2.8mm:H 96°, V 53°, D 110°
Function	
Audio Codec	G.711U/G.711A (default)
Exposure Control	Auto
White Balance	Auto
Gain Control	Auto
Digital 3D Noise Reduction	Support
OSD Information Setting	Large font OSD, OSD flashing on alarm, OSD position settings
SNTP	Support
Schedule Reboot	Support
Smart Defog	Support
Motion Detection	Support Humanoid Detection
Image Setting	Support Saturation, Brightness, Contrast, Sharpness adjustment
Image Style	Standard, Soft, Transparent
Day and Night Function	Auto, Always Black & White, Always Color, Scheduled Color
Privacy Mask	Support up 8 areas
Night Vision Optimization	Support
DWDR	Support
Screen Settings	Screen mirroring, Screen flipping
IP Adaptation	Support automatic adaptation of IP address (Optional)
Intelligent Analysis	Support Region Intrusion Detection, Line Crossing Detection, Video Blocking Detection, People Counting
Alarm Method	Email Alarm, Client Alarm
Remote Operation	System, Audio and Video, Image, Alarm, Network management, Storage management, Intelligent Analysis
Audio Function	Built-in Mic and Speaker
SD Card	Support(512G)
VQC Technology	Support
Network	
Ethernet	10/100Mbps Ethernet
Stream	2x Streams
Network Protocols	HTTP, TCP/IP, UDP, ICMP, RTSP, RTP, RTCP, SMTP, DHCP, DNS
ONVIF	Standard ONVIF
Network Transmission	CloudSEE 2.0
Browser	IE8+, Chrome18+, Firefox5.0+, Safari5.02+
User	Up to 13 Users
App	Support iOS/Android
General	
Lights	2 White LEDs + 2 IR LEDs
IR Distance	Up to 30 Meters
Waterproof Level	IP67
Power Supply	DC12V or PoE (IEEE802.3af)
Power Consumption	<4W (During Day); <6W (At Night)
Working Temperature	-25°C ~ 55°C
Working Humidity	5% ~ 95% Rh
Color/Material	White/Plastic+Metal
Dimensions (WxHxD)	106x94x106mm
Weight	320g
Installation Method	Wall or ceiling mount