

[www.maximaseguridad.ec](http://www.maximaseguridad.ec)



# BALLONS HD UTP-101P

Tarqui 19-25 entre Eugenio Espejo y Coronel Harris  
593 7 2835 248  
[info@maximaseguridad.ec](mailto:info@maximaseguridad.ec)



Real-time transmission , no power required, transmission distance to 500m

## UTP101P-HD




- Passive, no power required;
- Plug-and-play; Real-time and stable HDCVI/HDTVI/AHD/Analog transmission result;
- 500m matches the passive transceiver; 650m matches active transceiver;
- Excellent anti-interference , surge protection, ESD and lightning protection capability;
- ABS (Acrylonitrile-Butadiene-Styrene) shell; built-in extended coaxial cable, convenient for intensive engineering projects;
- Bayonet Nut Connector (BNC); press-fitting UTP terminal.



## Specification

## Application

Item	UTP101P-HD
Video Port	1 channel
Maximum Transmission Distance (with passive product)	HDCVI-720P:500m;HDCVI-1080P:150m; HDTVI-720P/1080P: 240m; AHD-720P/960P: 500m; AHD-1080P:420m Analog Video:600m;
Coaxial Video Port	Male BNC Port
Twisted-pair Video Port	2-channel screw push terminal
Video Compatibility	HDCVI/HDTVI/AHD, PAL/NTSC/SECAM Video
Bandwidth	0 ~ 75MHz
Anti-interference	>60dB
Coaxial Port Protection	2KV Per: IEC61000-4-5
Twisted-pair Port Protection	2KV(different mode) 4KV(common mode) Per: IEC61000-4-5
ESD	Level 3,1a Contact Discharge, Level 3,1b Air Discharge
Working Temperature	-10 ~ 55°C
Storage Temperature	-20°C~70°C
Humidity ( Non-condensing )	0 ~ 95%
Out Shell	ABS
Weight	23g

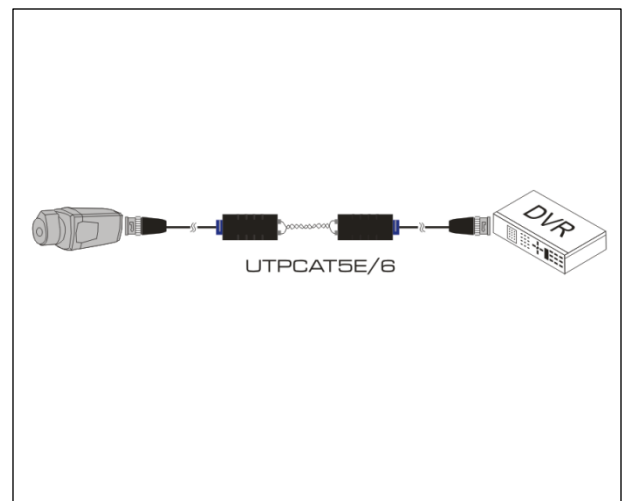

## Package List

Designation	Quantity
UTP101P-HD	2
User Manual	1

## Related Products

Designation	Model
Passive Analog HD-Video UTP Transceiver	UTP101P-HD1
Passive Analog HD-Video UTP Transceiver	UTP101P-HD2
Passive Analog HD-Video UTP Transceiver	UTP101P-HD5

