

Mono 182

PMH400W~420W-108M182 Half Cut Cell Solar Module



Multiple Main Grid Design

Better light utilization and current collection capability, effectively improve product power output and reliability.

Adaptability To Harsh Environments

Third party certification through high salt spray and high ammonia corrosion test.

Anti PID Guarantee


The attenuation rate caused by PID phenomenon is minimized by battery production technology optimization and material control.

Capacity Of Load

The whole assembly passes 2400Pa wind load and 5400Pa snow load.

Quality Guarantee

5-Year Warranty for Materials and Processing 25-Year Warranty for Extra linear Power Output

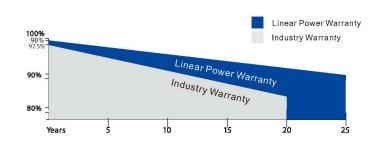

Specifications


Solar Cell (Type/Sizs)	Mono(182mm)		
Solar Cells Number	108Pcs(6*9*2)		
Dimensions	1722*1134*30mm		
Weight	21.5KG/Pcs		
Structure	3.2 Glass+EVA Film+Back		
Frame	Anodized aluminum alloy		
Junction Box	IP68/3*Bypass Diode		
Cable Cross Section Size	4.0mm ² /300mm		
Mechanical Load	Front 5400Pa/Back 2400Pa		
Packing Number	37Pcs/Pallet		
Carton Size	1750*1150*1250mm		
40'HQ Container	962 Pcs		


Electrical Parameters at STC

Module Type	PMH400W	PMH405W	PMH410W	PMH415W	PMH420W
Rate Maximum Power (Pmax)	400W	405W	410W	415W	420W
Module Efficiency	20.48%	20.74%	21.00%	21.25%	21.50%
Voltage at Pmax (Vmp)	30.65V	30.80V	30.95V	31.10V	31.25V
Current at Pmax (Imp)	13.06A	13.15A	13.25A	13.35A	13.45A
Open Circuit Volatge (Voc)	36.96V	37.10V	37.23V	37.36V	37.45V
Short Circuit Current (Isc)	13.82A	13.91A	14.00A	14.09A	14.18A
Power Tolerance	0~+5W				
Temperature Coefficent of Isc	+0.046% ℃				
Temperature Coefficent of Voc	−0.276%°C				
Temperature Coefficent of Pmax	−0.350%℃				
STC	Irradiance 1000W/m² Cell Temperature 25°C AM1.5				

Operating Conditions

Operating Temperature	-40~+85℃
Maximum System Voltage	1500VDC
NOCT	45±2 ℃
Fireproof Performance	Glass C
Maximum Series Fuse	25A
Temperature Coefficient of Voc	-0.276%/K
Temperature Coefficient of Isc	+0.046%/K

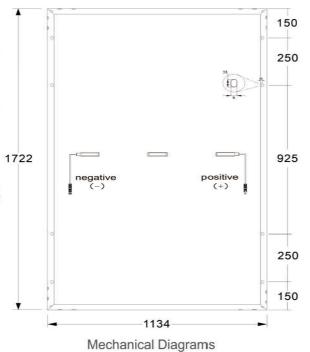



Characteristics

